


Mojave™

Grid-Hybrid Inverter



- Be ready for anything with off-grid capability
- Easily start motors and compressors commonly found in freezers and HVAC systems, outpacing other inverters
- Seamlessly AC-couple with UL 1741-SA listed grid-tied inverters up to 8kW for easy addition to existing solar PV systems
- Take ownership of your energy in the face of time-of-use rates, demand charges and net-metering changes
- Connect to the intuitive user interface via integrated Wi-Fi hotspot and a smartphone, tablet or laptop
- Access OPTICS RE™ via Ethernet or Wi-Fi internet connection
- Easily add a generator or other secondary AC source
- Quickly and easily install with mounting plate and roomy integrated wiring compartment

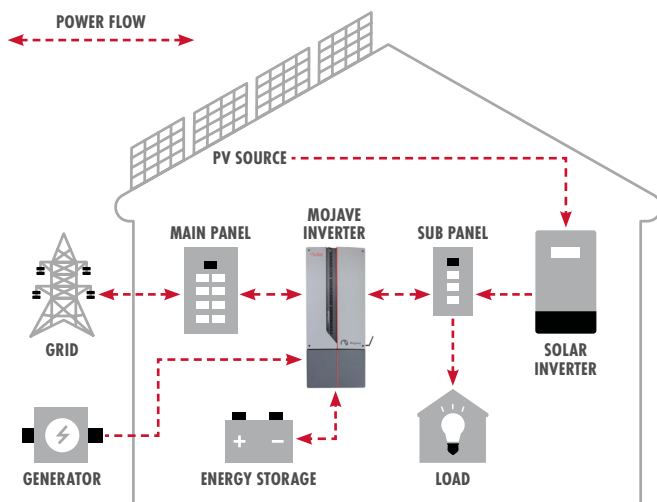

The Mojave™ platform combines the latest power electronics and control technology with the old-school muscle and practical features that define OutBack Power™.

The Mojave inverter continues the impressive legacy of robust off-grid and grid-hybrid performance for which OutBack Power's FX, FXR and Radian platforms are well known. But it doesn't stop there. The Mojave inverter does away with external system controllers and includes an integrated wiring compartment for faster, clutter-free installation.

The OGH18048A comes ready to AC-couple with most grid-tied inverters and 48 VDC batteries on the market today. It's the easy way to add the economic and resilience benefits of energy storage to existing residential PV systems.

On-grid or off, be ready for anything.

Mojave™ Inverter Specifications

Model:	OGHI8048A
AC Input/Output	
AC Voltage:	120/240VAC (split-phase)
AC Frequency:	60Hz
Max Peak/Continuous AC Output Power:	10000VA / 8000VA (derate above 40°C)
Max Peak/Continuous Output Current:	42A / 34A
Total Harmonic Distortion:	Typical: <2% Max: <5%
Power Factor at Rated Power:	1
Idle Power:	Invert Mode, No Load: 100W Idle: 10W
AC Coupling:	Up to 8kW
Battery	
Nominal DC Battery Voltage:	48VDC
Battery Voltage Range:	40 to 64VDC
Battery Types:	Flooded, AGM, Lithium-Ion*
Grid Interactivity	
Supported Operating Modes:	Immediate battery backup power, grid support (UL 1741 SA), net metering, non-export, maximum independence
Islanding Protection:	Yes – IEEE 1547 compliant
Supported Interconnection Standards:	IEEE 1547-2003, IEEE 1547.1-2005
Mechanical	
Weight (lb/kg):	133 / 60
Dimensions W × H × D (in/mm):	16 × 38 × 11.25 / 406 × 965 × 286
Chassis Type:	Indoor-only, vented, NEMA 1, IP2X
Additional Features	
Listings/Certifications:	UL 1741 SA, CSA 22.2 No. 107.1, IEEE 1547-2003, IEEE 1547.1-2005
RoHS:	Yes, directive 2011/65/EU
Operating Temperature Range:	-4 to 122°F (-20 to 50°C)
Warranty Duration:	10 years
Field-Upgradable Firmware:	Yes

*Visit <https://outbackpower.com/mojave-battery-compatibility> for details on battery compatibility



an EnerSys® company

Alpha Technologies Services, Inc. 3767 Alpha Way, Bellingham, WA 98226
 Tel: +1 360 435 6030 Technical Support: +1 360 618 4363 Email: sales@outbackpower.com
 For more information visit: www.outbackpower.com

© 2021 EnerSys. All Rights Reserved. Trademarks and logos are the property of Alpha Technologies Services, Inc., EnerSys and its affiliates unless otherwise noted. Subject to revisions without prior notice. E. & O.E.